

#218

APOLLO 12

HOURLY AVERAGED PLASMA DATA

69-099C-02B

PLASMA PARAMETER FINE RESOLUTION

69-099C-02A
71 - 063C - 4A, 4B

APOLLO 12 LM/ALSEP

PLASMA PARAM FINE RESOL ON MAG TAPE

69-099C-02A

This data set has been restored. There were originally 24 7-track, 800 BPI tapes written in BCD. There are four restored tapes written in ASCII. The DR tapes are 3480 cartridges and the DS tapes are 9-track, 6250 BPI. The original tapes were created on a 1108 computer and the restored tapes were created on an IBM 9021 computer. The DR and DS numbers along with the corresponding D numbers are as follows:

DR#	DS#	D#	FILES	TIME SPAN
DR004970	DS004970	D013780	1	11/19/69 - 03/02/70 (a)
		D011865	2	11/19/69 - 04/01/70 (b)
		D013781	3	03/17/70 - 06/28/70 (c)
		D012596	4	04/15/70 - 08/26/70
		D013783	5	07/12/70 - 10/24/70 (d)
		D012595	6	09/10/70 - 01/22/71 (e)
DR004971	DS004971	D013778	1	11/06/70 - 02/21/71 (f)
		D013779	2	03/05/71 - 06/18/71
		D013782	3	06/30/71 - 10/16/71
		D013777	4	10/28/71 - 02/10/72
		D016703	5	02/23/72 - 06/07/72 (g)
		D016702	6	06/20/72 - 10/04/72
DR004972	DS004972	D016701	1	10/15/72 - 01/29/73 (h)
		D023612	2	02/10/73 - 05/28/73 (i)
		D023613	3	06/08/73 - 09/22/73 (j)
		D023614	4	10/05/73 - 01/19/74
		D023615	5	01/31/74 - 05/17/74 (k)
		D023616	6	05/29/74 - 09/12/74 (l)
DR004973	DS004973	D023617	1	09/24/74 - 12/31/74
		D041547	2	09/24/74 - 01/07/75
		D041548	3	01/20/75 - 05/06/75 (m)
		D041549	4	05/19/75 - 09/01/75
		D041550	5	09/13/75 - 12/28/75
		D041551	6	01/10/76 - 03/26/76

- (a) D013780: Read error occurred in record 5646 of file 1.
- (b) D011865: Read errors occurred in records 815, 823, 831 of file 1.
- (c) D013781: Read error occurred in record 878 of file 1.
- (d) D013783: Read error occurred in record 5320 of file 1.
- (e) D013795: Read errors occurred in records 877, 1494, 5830 of file 1.
- (f) D013778: Read errors occurred in records 1101, 1653, 3233 of file 1.
- (g) D016703: Read error occurred in record 6420 of file 1.
- (h) D016701: Read error occurred in record 2417 of file 1.
- (i) D023612: Read error occurred in record 1118 of file 1.

- (j) D023613: Read errors occurred in records 979, 1003, 1105, 1393, 1478, 1493, 1494, 1555, 1662, 2121 of file 1.
- (k) D023615: Read error occurred in record 760 of file 1.
- (l) D023616: Read error occurred in record 462 of file 1.
- (m) D041548: Read error occurred in record 1364 of file 1.

<u>REQ. AGENT</u>	<u>RAND NO.</u>	<u>ACQ. AGENT</u>
JCH	RB3921, RB4680	DJH
MAW	RB5434	
DLB, VJP	RC2208	

APOLLO 12 & 15

69-099C-02A,02B

71-063C-04A,04B

This data set catalog consists of 24 Apollo 12 and 3 Apollo 15 Full Time Resolution Plasma Parameters data tapes and 7 Apollo 12 and 1 Apollo 15 Hourly Averaged Plasma data tapes. The tapes are 7 track, 800 BPI, BCD with 1 file of data. The tapes were created on a 1108 computer.

Time spans are as follows:

Apollo 12 69-099C-02A

<u>D#</u>	<u>C#</u>	<u>TIME SPAN</u>
D-11865	C-09227	11/19/69 - 04/01/70
D-12596	C-09777	04/15/70 - 08/26/70
D-12595	C-09776	09/10/70 - 01/22/71
D-13780	C-11218	11/19/69 - 03/02/70
D-13871	C-11219	03/17/70 - 06/28/70
D-13783	C-11221	07/12/70 - 10/24/70
D-13778	C-11215	11/06/70 - 02/21/71
D-13779	C-11217	03/05/71 - 06/18/71
D-13782	C-11220	06/30/71 - 10/16/71
D-13777	C-11216	10/28/71 - 02/10/72
D-16703	C-18727	02/23/72 - 06/08/72
D-16702	C-12979	06/20/72 - 10/04/72
D-16701	C-12978	10/15/72 - 01/29/73
D-23612	C-17677	02/10/73 - 05/28/73

APOLLO 12 69-099C-02A

<u>D#</u>	<u>C#</u>	<u>TIME SPAN</u>
D-23613	C-17678	6/08/73 - 9/22/73
D-23614	C-17679	10/05/73 - 1/19/74
D-23615	C-17680	1/31/74 - 5/17/74
D-23616	C-17681	5/29/74 - 9/12/74
D-23617	C-17682	9/24/74 - 12/31/74
D-41547	C-21220	9/24/74 - 1/07/75
D-41548	C-21221	1/26/75 - 5/06/75
D-41549	C-21222	5/19/75 - 9/01/75
D-41550	C-21223	9/13/75 - 12/28/75
D-41551	C-21224	1/10/76 - 3/26/76

APOLLO 12 69-099C-02B

D-16704	C-14536	11/19/69 - 1/29/73
D-23611	C-17676	2/10/73 - 12/31/73
D-41552	C-21255	9/24/74 - 1/07/75
D-41553	C-21256	1/20/75 - 5/06/75
D-41554	C-21257	5/19/75 - 9/01/75
D-41555	C-21258	9/13/75 - 12/28/75
D-41556	C-21259	1/10/76 - 3/26/76

APOLLO 15 71-063C-04A

D-13774	C-11223	7/31/71 - 12/08/71
D-16706	C-13459	12/25/71 - 5/02/72
D-16705	C-12980	5/18/72 - 6/30/72

APOLLO 15 71-063C-04B

D-16707	C-19615	7/31/71 - 6/30/72
---------	---------	-------------------

ALSEP SOLAR WIND SPECTROMETER PLASMA DATA AS OBSERVED
AT THE APOLLO 12 AND 15 LANDING SITES

by

B. E. Goldstein, D. R. Clay

C. W. Snyder and M. Neugebauer

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

This paper presents the results of one phase of research carried out at the Jet Propulsion Laboratory, California Institute of Technology, under contract No. NAS7-100, sponsored by the National Aeronautics and Space Administration.

TABLE OF CONTENTS

I.	Introduction	3
II.	Instrument Description	4
III.	Instrument Site Operation, Data Coverage	5
IV.	Data Acquisition Sequence	6
V.	Data Analysis	7
VI.	Description of Variables on Tape	9
VII.	Format of Full Time Resolution Data Tapes	11
VIII.	Format of Data Tapes of Hourly Averages	13
IX.	Format of Plots	16
X.	Use of Data	17
	References	18
	Bibliography	19
	Tables	
	Figure Captions	
	Figures	

I. INTRODUCTION

The JPL Solar Wind Spectrometers are part of the Apollo Lunar Surface Experiment Packages operating at the Apollo 12 and 15 landing sites. The data are now available from the National Space Science Data Center in several forms. There are plots of hourly average values for solar wind bulk speed, direction, proton density, thermal speed, and alpha particle to proton ratio. Positive ion data are available on magnetic tape, both in the form of hourly averages and as unaveraged individual measurements. Plots of unaveraged data and electron data are not available from NSSDC; requests for this information should be directed to the experimenters.

II. INSTRUMENT DESCRIPTION

The basic sensor in the solar wind spectrometer is a Faraday cup that measures the charged particle flux entering the cup. By collecting these ions and using a sensitive current amplifier, the resultant current flow is determined. Energy spectra of positively and negatively charged particles are obtained by applying fixed sequences of square wave ac retarding potentials to a modulation grid and measuring the resulting changes in current. Similar detectors have been flown on a variety of space probes, and are described in Hundhausen (1968). Further descriptions of the solar wind spectrometer experiments are given in Snyder et al. (1970), and Clay et al. (1972).

To be sensitive to solar wind plasma from any direction (above the horizon of the Moon), and to ascertain the solar wind angular distribution, the solar wind spectrometer has an array of seven cups. Since the cups are identical, an isotropic particle flux would produce equal currents in each cup. If the flux is not isotropic but appears in more than one cup, analysis of the relative amounts of current in the collectors can provide information on the direction of plasma flow and its anisotropy. The central cup faces vertically, and the remaining six cups symmetrically surround the central cup (Fig. 1), facing 60° off vertical. The combined acceptance cones of all cups cover most of the upward hemisphere. Each cup has a circular opening, five circular grids, and a circular collector (Fig. 2). The functions of the grid structures are to apply an ac modulating field to incoming particles and to screen the modulating field from the inputs to the sensitive preamplifiers. The entrance apertures of the cups were protected from damage or dust by covers that remained in place until after

the departure of the lunar module. The angular sensitivity of the Faraday cup sensor to collimated ion beams has been measured by laboratory plasma calibration. The result, averaged over all seven cups, is shown in Fig. 3 and for positive ions, agrees quite well with the measured optical transparency.

The electronics for the solar-wind spectrometer is in a temperature controlled container that hangs below the sensor assembly. The electronics includes power supplies, a digital programmer that controls the voltages in the sensors as required, current measuring circuitry, and data conditioning circuits.

On the Moon, the instrument is hung from a pair of knife edges so that it is free to swing about an east-west horizontal axis and, hence, is self leveling in one dimension. Rotations about the north-south axis and the vertical axis are determined from shadow patterns on photographs and, for Apollo 12, from the effect of sunlight on a sensor.

III. INSTRUMENT SITE, OPERATION, DATA COVERAGE

The Apollo 12 Solar Wind Spectrometer is located 3° south and 23° west on the lunar surface. The Apollo 15 Solar Wind Spectrometer is 26° north and 4° east. Orientations of the instruments at the local sites are determined from photographs of instrument shadow patterns. The Apollo 12 orientation is known within 0.5° and the Apollo 15 orientation within 1.5° .

Data coverage for the Apollo 12 Solar Wind Spectrometer begins on day 323 of 1969; the instrument is still (day 60 of 1973) operational. The Apollo 15 SWS began operations on day 212 of 1971 and failed on day 182 of 1972. During these periods data coverage was essentially complete, but the data supplied to NSSDC exclude times during lunar night when no currents were measurable.

IV. DATA ACQUISITION SEQUENCE

The solar wind spectrometer operates in an invariable sequence in which a complete set of plasma measurements is made every 28.1 sec. The sequence consists of 14 energy steps spaced a factor of $\sqrt{2}$ apart for positive ions and seven energy steps spaced a factor of 2 apart for electrons. A large number of internal calibrations are provided, and every critical voltage is read out at intervals of 7.5 min or less.

In the reduced data records and the analyzed data that are supplied to the NSSDC, this data acquisition sequence does not appear, since only a small fraction of the readings in the 186-measurement sequence represent meaningful data at any given time. For most purposes of data analysis the details of this sequence are irrelevant, but they do become important when the precise time of a particular measurement is of interest. The following partial description of the sequence will enable the determination of the time of a measurement to a precision of about one second.

The sequence begins with the positive-ion measurements, the energy steps proceeding from the lowest to the highest. At each step 8 measurements are made. The first is the sum of the currents in all 7 cups; then the 7 cups are sampled in sequence. There are 112 measurements in the positive ion subsequence, followed by 16 calibration measurements and a 56-measurement electron subsequence. The sequence ends with two data words which provide a sequence counter. In the ground data processing each sequence is tagged with a time corresponding to the earth receipt time of the end of the last data word in the sequence. Application of a light-transit-time correction provides the time at which the sequence terminated on the Moon. In the reduced data records the time is rounded off to the nearest whole second.

The time at which the measurement of the plasma properties was actually made can be inferred as follows. Using the calibration data presented in Table 1 and knowing the gain state of the instrument, the proton bulk velocity will indicate which energy step provided the largest current readings. (If the plasma was incident at a large angle from the cup, a correction by the cosine of the incidence angle will be necessary.) Then knowing which cup or cups and which energy step or steps were involved in the measurement, the measurement time is obtained by subtracting from the sequence-end time the function Δt :

$$\Delta t = 28.13 - 0.15094 \times (\text{STEP} \times 8 + \text{CUP}).$$

V. DATA ANALYSIS

For each proton spectrum the cup with the greatest total current was found. The currents in the individual energy channels were then least squares fit to the data model. This model assumed a convected Maxwell-Boltzmann proton distribution with unknown parameters — bulk velocity, most probable thermal speed, and density. An alpha particle distribution with the same velocity and thermal speed as protons was assumed with alpha particle density unknown. For these preliminary estimates the velocity vector was assumed perpendicular to the collector plate. Due to the relatively broad energy channels it was difficult to distinguish between alpha particles and energetic protons when the ratio of most probable thermal speed to proton speed was greater than 0.25. Thus a jump in alpha/proton ratio across a shock might be estimated. The broad channels also prevented accurate measurement of thermal speeds less than 10% of the bulk speed.

The estimates as described above are uncorrected for angular direction of the plasma. Angles were estimated from examination of current in other cups as described later in this section. After the angle between the plasma beam and the cup axis was determined, corrections were made to all parameters to account for the angular response of the Faraday cup and aberration effects.

Several definitions are required as a preliminary to the description of the angular analysis. Side cups are all cups except cup 7 (the vertical cup). The side cup with the greatest current (summed over all channels) is referred to as Cup A. The adjacent cup in the counterclockwise direction from Cup A (as viewed from above) is Cup B, the clockwise cup is Cup C. A noise level was chosen based upon fluctuations in zero level currents. If Cup 7, Cup A, and Cup B or Cup C are above noise, the solar wind direction is determined. Otherwise, assumptions are required.

The angle between the plasma and the normal to Cup 7 is defined as β . The plasma direction projected downward onto the instrument and measured clockwise from a line between cups 1 and 7 is defined to be the azimuthal angle α (Fig. 4). If no current above noise is measured in Cup 7, the β angle required by assuming radial flow of the solar wind from the sun is assumed. If this assumption, however, implies that current should be measured in Cup 7, the assumed angle is limited to increasingly larger angles until the predicted current in Cup 7 decreases to the noise level value. Similarly, no current in Cup A leads to assuming β or limiting β to smaller values.

The α angle is similarly predicted, measured, or limited. If current is available only in Cup A, then the α angle for radial flow from

from the sun is assumed. If this requires currents above noise in Cups B or C, the assumed α angle is limited closer to the Cup A direction. If currents in Cup B or C are available, the α angle is measured directly. After angles were determined, conversion was made to solar ecliptic coordinates taking into account the known orientations of the instruments; i.e., the direction of the bulk velocity is given by DELE and DELNE, the angle in the ecliptic and the angle north of the ecliptic.

VI DESCRIPTION OF VARIABLES ON TAPE

The variables provided on the data tapes are listed here with a brief definition. Refer also to the discussion of variables in the previous section.

<u>Symbol</u>	<u>Description</u>
DP	Proton density (protons/cm ³).
AP	Ratio of alpha-particle density to proton density.
VEL	Solar wind proton speed (km/sec).
THERMV	Most probable thermal speed (km/sec)

Thus, the fitted proton distribution function, f_p , is

$$f_p(\bar{v}) = \frac{DP}{THERMV^3 \sqrt{\pi}^3} e^{- (\bar{v} - VEL\bar{n})^2 / THERMV^2},$$

where \bar{n} is a unit vector in the solar wind direction.

DELE: East-West angle in solar ecliptic coordinates in degrees; no correction has been made for aberration due to orbital velocity. A positive value means a plasma velocity component directed opposite to the earth's orbital motion; i.e., an average +5° due to aberration is typical.

DELNE: North-South angle in solar ecliptic coordinates in degrees.

This number is positive if the plasma velocity has a northward component; i.e., positive values for flow coming from south of the ecliptic.

FLAG: FLAG is a 36 bit word, the definition of which is given in Table 2. Bits are numbered 0 to 35 with bit 0 being the high-order bit.

Most of these bits will be of no interest to the users of the data; exceptions to this rule are explained here. Bits 15 and 16 are IA which has values from zero to three; bits 17 and 18 are IB. Bit 19 is IDISCP.

IA is the angle code indicating how the angle α was derived as explained in the previous section. If IA = 0, α is measured. If IA = 1, α is assumed. If IA = 2, α is limited. If IA = 3, then also IB = 3 and the cup observing the protons is too far from the sun direction to be plausible. Similarly, IB is the angle code for the β angle. If IB = 0, β is measured, and so on. IDISCP = 1 indicates a side cup not adjacent to Cup A had current above noise and greater than current in Cup B or Cup C. Bit 30 indicates the instrument gain level that determines the value of the energy steps; 0 is low gain, 1 is high gain.

RMS: Percentage error in current fitting program.

KUPA: Cup with the largest current excluding Cup 7.

CURA: Current in picoamps in Cup A.

CURB: Current in picoamps in Cup B.

CURC: Current in picoamps in Cup C.

CUR7: Current in picoamps in Cup 7.

For definitions of A, B, and C, see the section on data analysis.

FACTD: Correction factor for Maxwell-Boltzmann least squares estimates of density to account for decrease in transparency of cup with increasing angle of plasma beam from cup normal; typical values range between 1.2 and 3.5.

PD is a product of the preliminary density estimate and the correction factor. VEL is similarly corrected for the cosine of the angle between the plasma beam and the cup normal.

XNOISE: Noise level in picoamperes used in estimating angles.

VII. FORMAT OF FULL TIME RESOLUTION DATA TAPES

The resultant parameters from analysis of each plasma spectrum (each 28 seconds) are written onto these tapes. Several months of data are placed on each digital magnetic tape. These tapes are written in BCD format on 7 tracks at 800 characters per inch and even parity.

All physical records contain 384 words which are blocked from 32 logical records of 12 words each. There are 4 types of logical records: (1) plasma data for one spectrum, (2) label information, (3) pseudo end of file, and (4) fill data.

The plasma data have the following format for each logical record. There are 72 BCD characters in the 12 words.

<u>Character</u>	<u>Parameter</u>
1 - 6	Not significant (used by input/output of specific computer)
7	BLANK
8 - 16	TIME DDDHHMMSS
17 - 20	DP*10
21-22	AP*100
23 - 26	VEL
27 - 29	THERMV
30 - 33	DELE*10
34 - 37	DELNE*10

<u>Character</u>	<u>Parameter</u>
38 - 49	FLAG
50 - 51	RMS
52	KUPA
53 - 56	CURA
57 - 59	CURB
60 - 62	CURC
63 - 66	CUR7
67 - 69	FACTD*100
70 - 72	XNOISE*10

The 9 characters of TIME have the day-hour-minute-second of year at the end of spectrum measurement in form of (DDDHMMSS). The first day of the year is Day 1. The 12 characters of FLAG are an octal representation of the 36 bit word.

One can use FORTRAN format controlled READ, and the following example could be successfully used:

```
      READ (Unit, 10) ITIM, DP, AP, VEL, THERMV, DELE, DELNE,  
      *FLAG, RMS, KUPA, CURA, CURB, CURC, CUR7, FACTD, XNOISE  
10      FORMAT (6X, IX, I9, F4.1, F2.2, F4.0, F3.0, 2F4.1, F12,  
      *F2.0, I1, F4.0, 2F3.0, F4.0, F3.2, F3.1)
```

NOTE: The format supplied decimal points reduce the appropriate variables by factors of 10 to yield correct values.

The label records are used to identify the information contained on the tape and can be ignored by the general user. The first logical record will always be a label and may be followed by other label records.

Each label record has the same format as the plasma data with certain parameters redefined. Label records are identifiable by the illegal time of DDDHHMMSS = 000999999. For this record, DP*10 is the space-craft number (12 indicates Apollo 12 instrument and 15 indicates Apollo 15), AP*100 is the year for the first data (e.g., 70 indicates year 1970), VEL is the starting day for processing, THERMV is the starting hour of processing, DELE*10 is the last day of processing, and DELNE*10 is the last hour.

The pseudo-end-of-file record is a logical record with the illegal time of DDDHHMMSS = 499000000. All 15 remaining variables contain fill data. This record always follows the last plasma data and precedes the two hardware produced EOF marks on the tape.

Fill-data may be used at any time but its primary use is to complete the end block. Fill data has the illegal time of +0, -0 or all blanks. All other 15 variables also contain values of +0, -0, or blanks.

VIII. FORMAT OF DATA TAPES OF HOURLY AVERAGES

The averaged values of parameters from analysis of plasma spectra are placed on a digital magnetic tape. This tape is written in BCD format on 7 tracks, at 800 characters per inch and even parity. The averaged values are the result of combining individual spectral results into hourly averages.

There are 4 sets of criteria to determine which spectra to combine. The first set allows all spectra where results from analysis give an answer. The average values of 6 basic parameters (proton density, alpha-proton ratio, plasma velocity, plasma thermal speed, and plasma angle from the sun's direction in and out of ecliptic plane), their 6 RMS deviations and the number of spectra are included.

The second set of hourly averages are similar to the first except that each spectrum has been screened to pass the requirements of small RMS error on curve fitting (RMS < 20) and that thermal speed be less than 1/2 bulk velocity. This set is a subset of set one.

The third set is a subset of set two, and has the further requirement that one and only one of the angles be measured (as compared to merely consistent with assumed solar plasma direction).

The fourth set is also a subset of set two, and has the requirement that both angles are measured. This set is quite small for Apollo 12 data and is disjoint with subset three.

The hourly average tape has two logical records of 18 words for each hour of data analyzed, and is blocked 2 logical records per physical record of 36 words. There are two types of records: 1) data and 2) pseudo-end-of-file.

Data records have the following format for the 108 BCD characters of each logical record:

Logical Record One

<u>Char.</u>	<u>Parameter</u>	<u>Comments</u>
1 - 6	Not significant	Input/output control for computer used
7	Blank	
8 - 9	ISC	Spacecraft number
10 - 11	IYR	YEAR
12 - 18	TIME	Day-Hour-Min DDDHHMM
19 - 21	NSI	Number of spectra in average set one
22 - 25	DPl*10	Ten times average proton density (P/cm^3)

Logical Record One (cont.)

<u>Char.</u>	<u>Parameter</u>	<u>Comments</u>
26 - 27	AP1*100	100 times alpha-to-proton density ratio.
28 - 31	VEL1	Velocity of protons (km/sec)
32 - 34	THV1	Thermal velocity (km/sec)
35 - 38	DE1*10	Ten times DELE (degrees)
39 - 42	DNEL*10	Ten Times DELNE (degrees)
43 - 46	DDP1*10	Ten times the RMS deviation of DPL.
47 - 48	DAP1	RMS deviation of AP1*100
49 - 52	DVELI	RMS deviation of VEL1
53 - 55	DTHV1	RMS deviation of THV1
56 - 59	DDEL1*10	Ten times RMS deviation of DEL
60 - 63	DDNEL*10	Ten times RMS deviation of DNE1
64 - 108	SAME 13 variables for Average set 2	

Logical Record Two

<u>Char.</u>	<u>Parameter</u>	<u>Comments</u>
1 - 6	Not significant	Used for I/O control
7	Blank	
8 - 18	Blank	
19 - 63	Same 13 variables for averages set 3.	
64 - 108	Same 13 variables for averages set 4.	

If one uses format control for reading each logical record, a FORTRAN READ statement to place data into ISC (Spacecraft), IYR (year), ITIM (Time = DDDHHMM), NS(4) (number of spectra in each of 4 averages), and AVE(2,6,4) (average values of parameter, its RMS deviation for 6 variables and for 4 average sets) is:

```
READ(UNIT,10) ISC, IYR, ITIM, (NS(K), ((AVE(I,J,K),J=1,6),  
* I = 1,2),K = 1,4)  
10    FORMAT(6X, 1X, 2I2, I3, 2(F4.1, F 2.2, F4.0, F3.0, 2F4.1)),  
* 1, 6X, 12.X, 2(I3, 2(F4.1, F2.2, F4.0, F3.0, 2F4.1)) )
```

NOTE: The format supplied decimal point reduces the appropriate variables by factors of 10 to yield correct values.

The last physical record has the same format but is a psuedo end-of-file and has the illegal time of DDDHHMM = 4990000. ISC and IYR are the same as for data, but all 52 variables which follow have fill data of blanks. Following the psuedo end-of-file are 2 hardware EOF marks.

IX. FORMAT OF PLOTS

Plots provided to NSSDC show hourly averages of selected data (the second set of data described in the section on hourly average data tapes). Proton velocity is in km/sec. Most probable thermal speed, $v = \sqrt{2kT/m_p}$ is in km/sec. Density is measured in protons cm^{-3} . The angles DELE and DELNE are discussed in the section "Description of Variables on Tape," and are measured in degrees. Alpha/Proton ratio is the ratio of alpha particle number density to proton number density. January 1 is Day 1. Figure 5 is a sample plot that illustrates the available information.

X. USE OF DATA

Users should reject all fitted parameters for which RMS = 99., IA = 3, or DP = 0.0. A somewhat stronger set of criteria for rejecting bad data is RMS > 20, IA = 3, IDISCP = 1, THERMV > $\frac{1}{2}$ VP, or DP = 0.0.

Changes in assumptions involving angles can cause unrealistic discontinuities in plasma direction, speed, and density. The user is advised to study the section on data analysis. FACTD, CURA, CURB, CURC, CUR7, and XNOISE are provided to allow the user to remove the effects of changes in estimated angle if he so desires.

A final warning is that plasma velocities and densities measured at the Apollo 12 site are often perturbed from solar wind values. Velocity decreases of 50 km/sec and density increases of 30% due to the 38 γ field at the Apollo 12 site have been observed. This topic is discussed by Neugebauer et al. (1972). At present we have no reason to believe that plasma parameters at the Apollo 15 site differ significantly from the values in the unperturbed solar wind.

REFERENCES

- Clay, D. R., B. E. Goldstein, M. Neugebauer, and C. W. Snyder, Solar Wind Spectrometer Experiment, Apollo 15 Preliminary Science Report, NASA SP-289, 1972, 10-1.
- Hundhausen, A. J., Direct Observations of Solar Wind Particles, Space Sci. Rev., 8, 1968, 690.
- Neugebauer, M., C. W. Snyder, D. R. Clay, and B. E. Goldstein, Solar Wind Observations on the Lunar Surface with the Apollo 12 ALSEP, Planetary Space Sci., 20, 1972, 1577.
- Snyder, C. W., D. R. Clay, and M. Neugebauer, The Solar Wind Spectrometer Experiment, Apollo 12 Preliminary Science Report, NASA SP-235, 1970, 75.

BIBLIOGRAPHY

- Bratenahl, A., B. E. Goldstein, D. R. Clay, and M. M. Neugebauer, Magnetopause Boundary Layer Structure at Lunar Distance from Correlated Apollo 12 and 15 ALSEP Data, to be presented at April 1973 American Geophysical Union Meeting.
- Burke, W. J., F. J. Rich, D. L. Reasoner, D. S. Colburn, and B. E. Goldstein, Effects on the Geomagnetic Tail at $60 R_e$ of the Geomagnetic Storm of April 9, 1971, submitted to J. Geophys. Res.
- Burlaga, S. F., J. Rahe, B. Donn, and Mr. Neugebauer, Solar Wind Interaction with Comet Bennett (1969i), submitted to Solar Physics.
- Clay, D. R., B. E. Goldstein, M. Neugebauer, and C. W. Snyder, Solar Wind Spectrometer Experiment, Apollo 15 Preliminary Science Report, NASA SP-289, 10-1 (1972).
- Clay, D. R., B. E. Goldstein, M. Neugebauer, and C. W. Snyder, Differences of Solar Wind Observations at Two Lunar Sites, abstract, EOS, Transactions of the American Geophysical Union, 1972 (November) SS37.
- Dyal, P., C. W. Parkin, C. W. Snyder, and D. R. Clay, Measurements of Lunar Magnetic Field Interaction with the Solar Wind, Nature 236, 381 (1972).
- Goldstein, B. E., Observations of Electrons at the Lunar Surface, abstract, EOS, Transactions of the American Geophysical Union, 1972 (November) SM79.
- Manka, R. H., F. C. Michel, and J. W. Freeman, Jr., Evidence for Acceleration of Lunar Ions, Proceedings of the Third Lunar Science Conference, Houston, 10-13 January 1972.

Neugebauer, M., C. W. Snyder, D. R. Clay, and B. E. Goldstein, Solar Wind Observations on the Lunar Surface with the Apollo 12 ALSEP, Planet. Space Sci., 20, 1972.

Snyder, C. W., D. R. Clay, and M. Neugebauer, The Solar Wind Spectrometer Experiment, Apollo 12 Preliminary Science Report, NASA SP-235, 75 (1970).

TABLE 1

Position and Width of SWS Energy Steps in Terms of Proton Velocity
for Normal Incidence (Velocities expressed in km/sec).

STEP	SWS APOLLO 12		HIGH GAIN		
	LOW GAIN MEAN	WIDTH	MEAN	WIDTH	STEP
1	62	20	112	21	1
2	91	18	143	25	2
3	120	22	175	30	3
4	156	28	216	37	4
5	191	32	259	43	5
6	235	40	314	53	6
7	285	48	377	62	7
8	337	57	446	74	8
9	400	67	527	87	9
10	480	79	629	104	10
11	569	92	744	122	11
12	682	114	893	149	12
13	807	132	1055	172	13
14	968	157	1266	206	14

STEP	SWS APOLLO 15		HIGH GAIN		
	LOW GAIN MEAN	WIDTH	MEAN	WIDTH	STEP
1	66	13	105	20	1
2	90	17	135	25	2
3	120	20	169	28	3
4	151	26	208	35	4
5	188	31	252	42	5
6	230	38	305	51	6
7	280	46	370	60	7
8	333	55	439	71	8
9	395	64	519	83	9
10	469	77	616	103	10
11	557	91	730	119	11
12	666	109	874	144	12
13	791	130	1039	170	13
14	946	154	1235	218	14

TABLE 2 - SIGNIFICANCE OF FLAG WORD

<u>Bit</u>	<u>Values</u>	<u>Significance</u>
0	0	Unused
1	0	Unused
2	0,1	l = no current detectable
3	0	Unused
4	0,1	l = peak current too small to determine spectrum
5	0,1	l = peak current in cup not near sun
6,7	0,1,2,3	Number of cups with measurable current (0 = 4 cups)
8	0,1	l = no proton analysis (see other bits for reason)
9	0,1	l = spurious negative currents at low energies
10	0,1	l = spectrum too broad (hot) for meaningful analysis
11	0,1	l = current in analyzed cup marginally small (<7 pa)
12	0,1	l = RMS fit worse than 25%
13	0,1	l = peak current in lowest or highest energy level
14	0,1	l = proton energy levels 13 and 14 unused
15,16	0,1,2,3	Angle code for alpha (see text)
17,18	0,1,2,3	Angle code for beta (see text)
19	0,1	l = discrepancy in cup currents (IDISC)
20	0,1	l = RMS fit worse than 60%
21	0,1	l = pickup current from modulator higher than normal
22	0,1	l = value of DELE or DELNE > 30
23	0,1	l = electrometer zero level shifted by > 0.8 pa
24	0,1	l = no electron data for this time
25	0,1	l = electron currents marginally small
26	0	Unused
27	0	Unused
28	0	Unused
29	0	Unused
30	0,1	0 = low gain, l = high gain
31	0,1	No proton data for this time
32	0,1	No proton data for this time (bit errors)
33	0,1	l = no electron data for this time
34	0,1	l = no electron data for this time (bit errors)
35	0	Unused

FIGURE CAPTIONS

FIGURE 1:

Orientation of Apollo 12 SWS on the lunar surface. The Apollo 15 SWS is rotated 180°.

FIGURE 2:

Faraday-cup sensor.

FIGURE 3:

Angular response of the Faraday cup.

FIGURE 4:


Illustrations of the α and β angles.


FIGURE 5:


Sample plot of hourly averages.


Lunation is the number of lunations following Apollo 12 turn-on in November 1969. Year and Day are the time for local noon at Apollo 12 site. Thermal speed is located below the bulk velocity in velocity graphs and Alpha/Proton density ratio is located below Proton density in Density graph.

Data are plotted only for hours which contain 25 or more spectra.

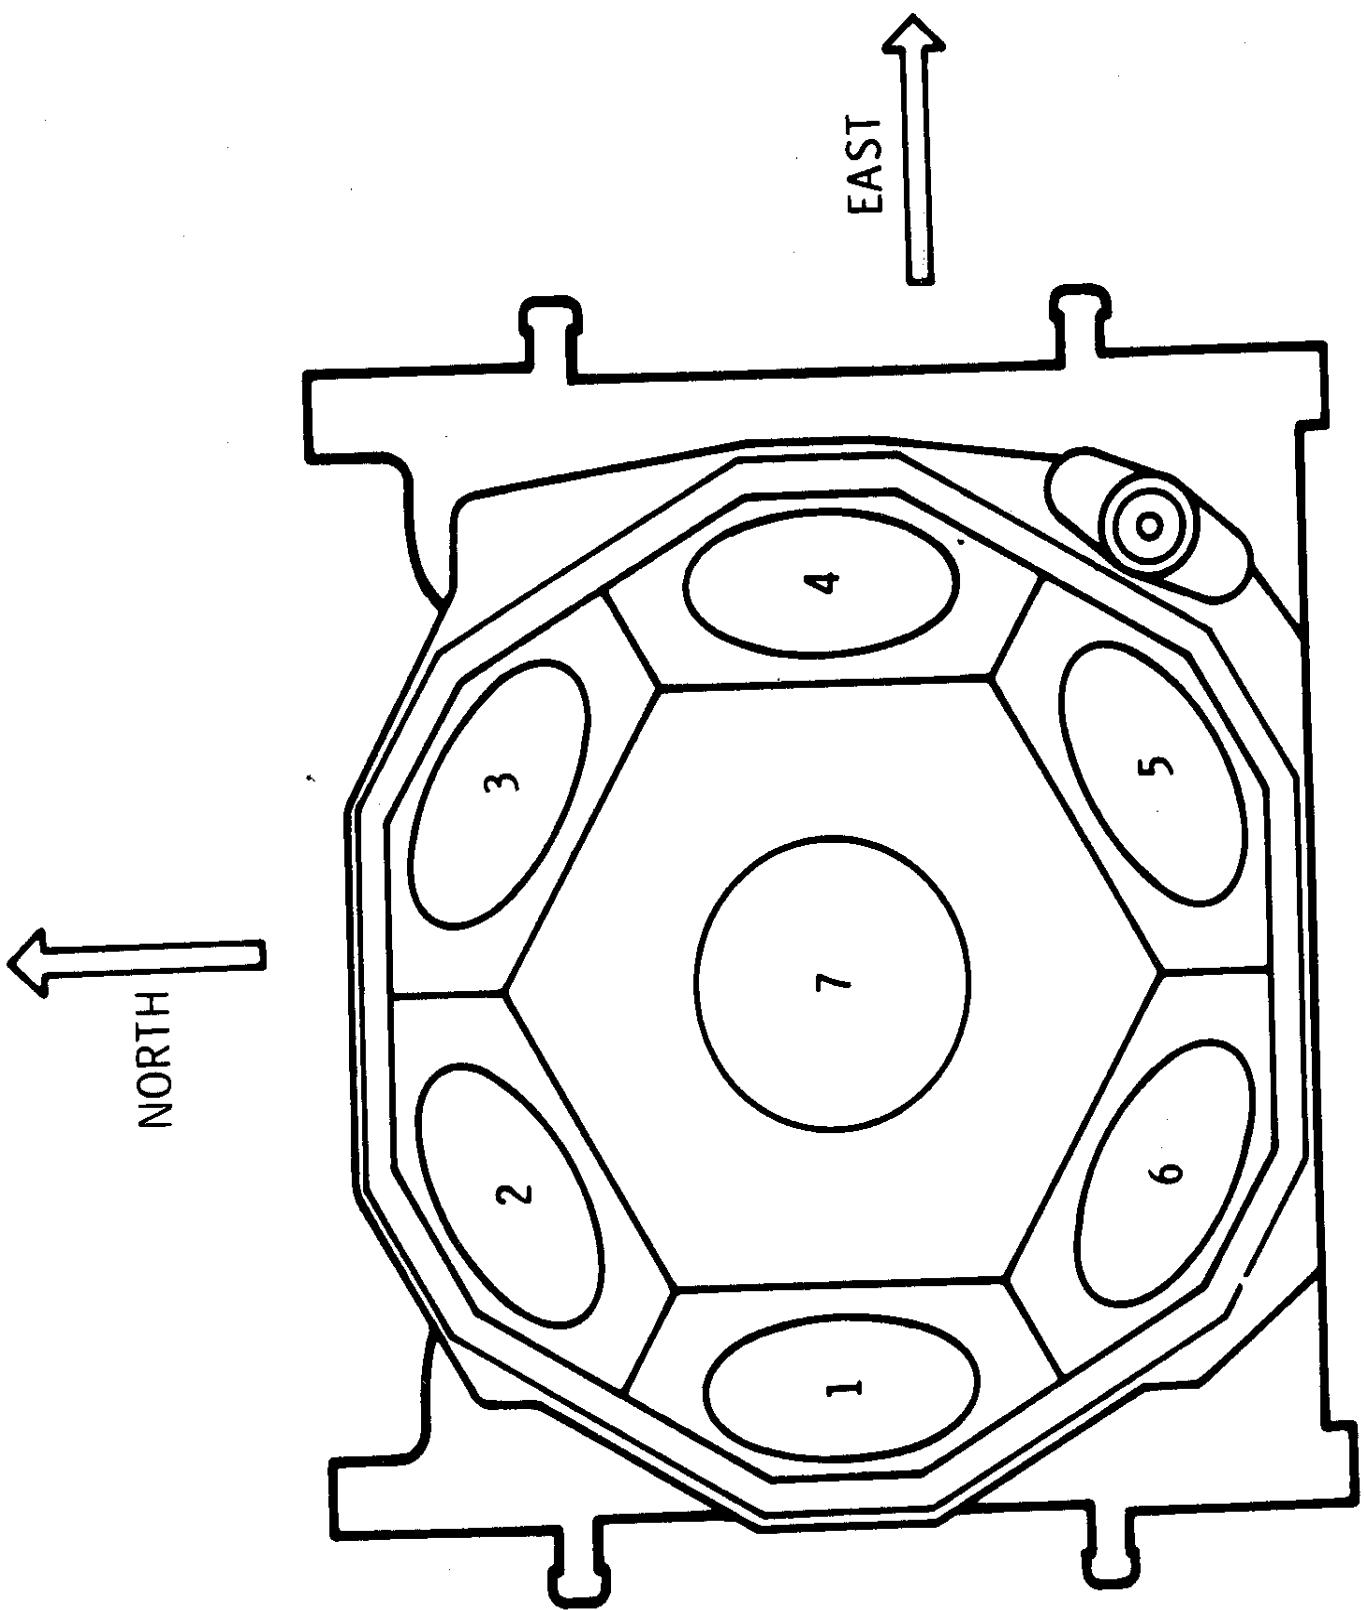


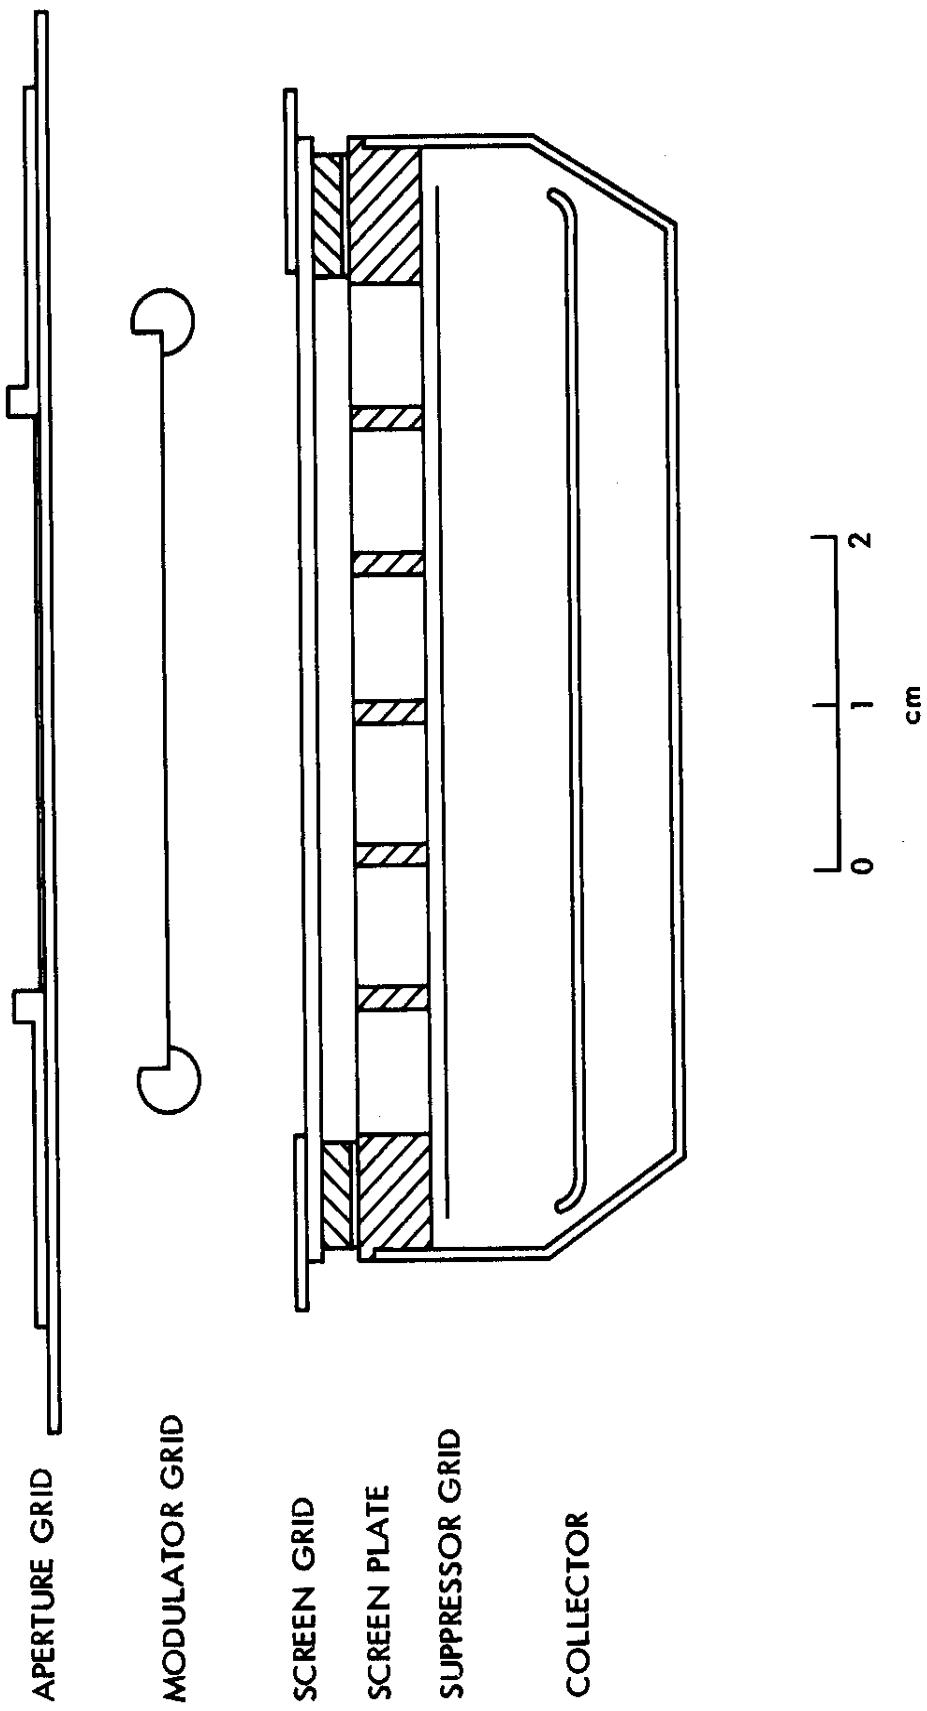

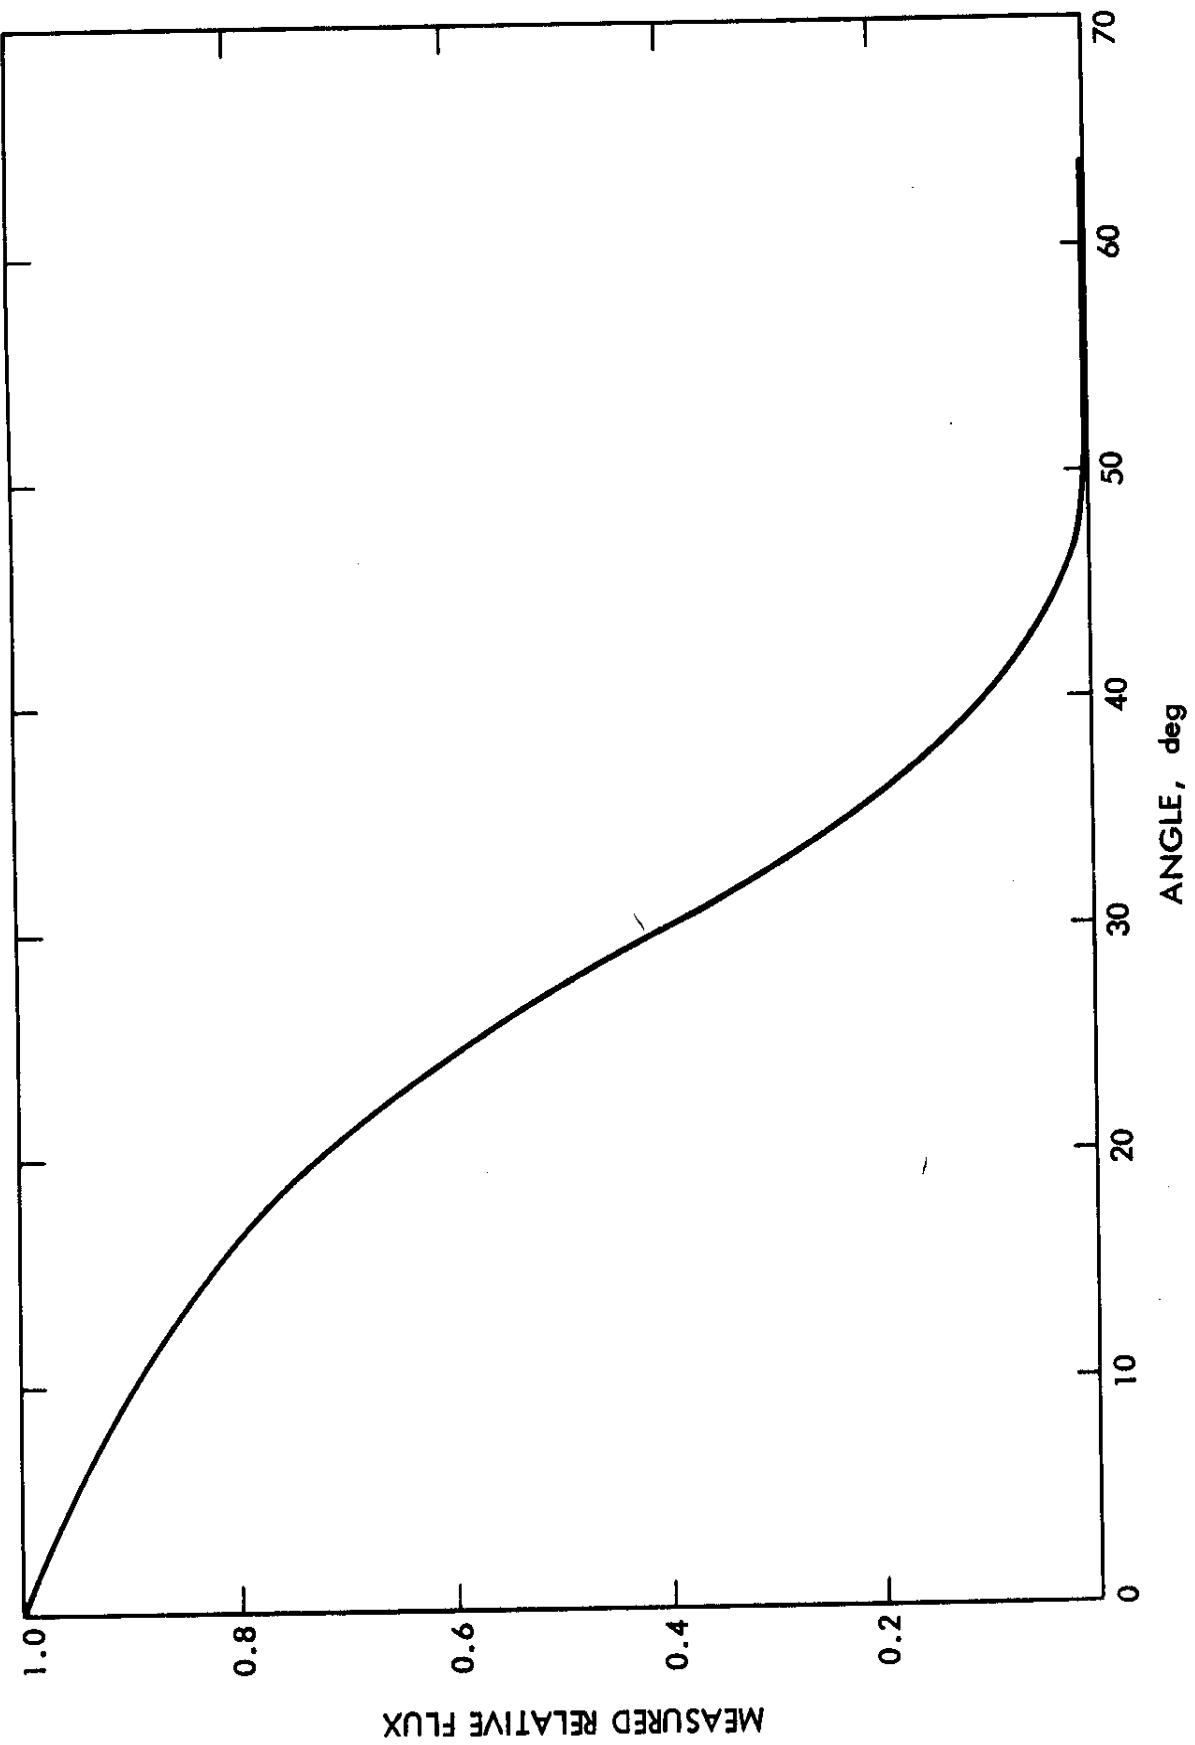

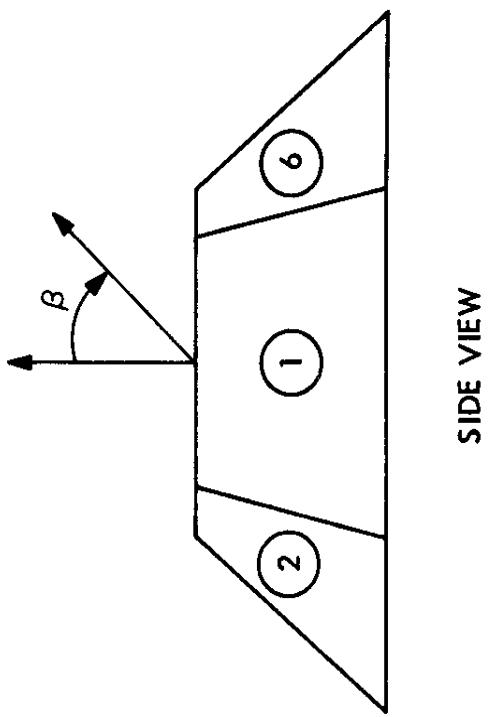


SIDE VIEW

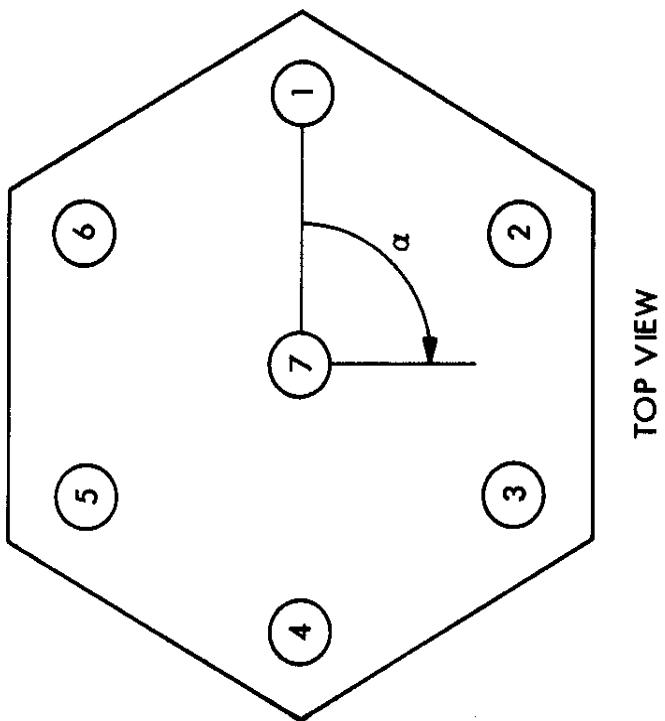

TOP VIEW

SOLAR WIND SPECTROMETER APOLLO-12 LUNAR-OS.

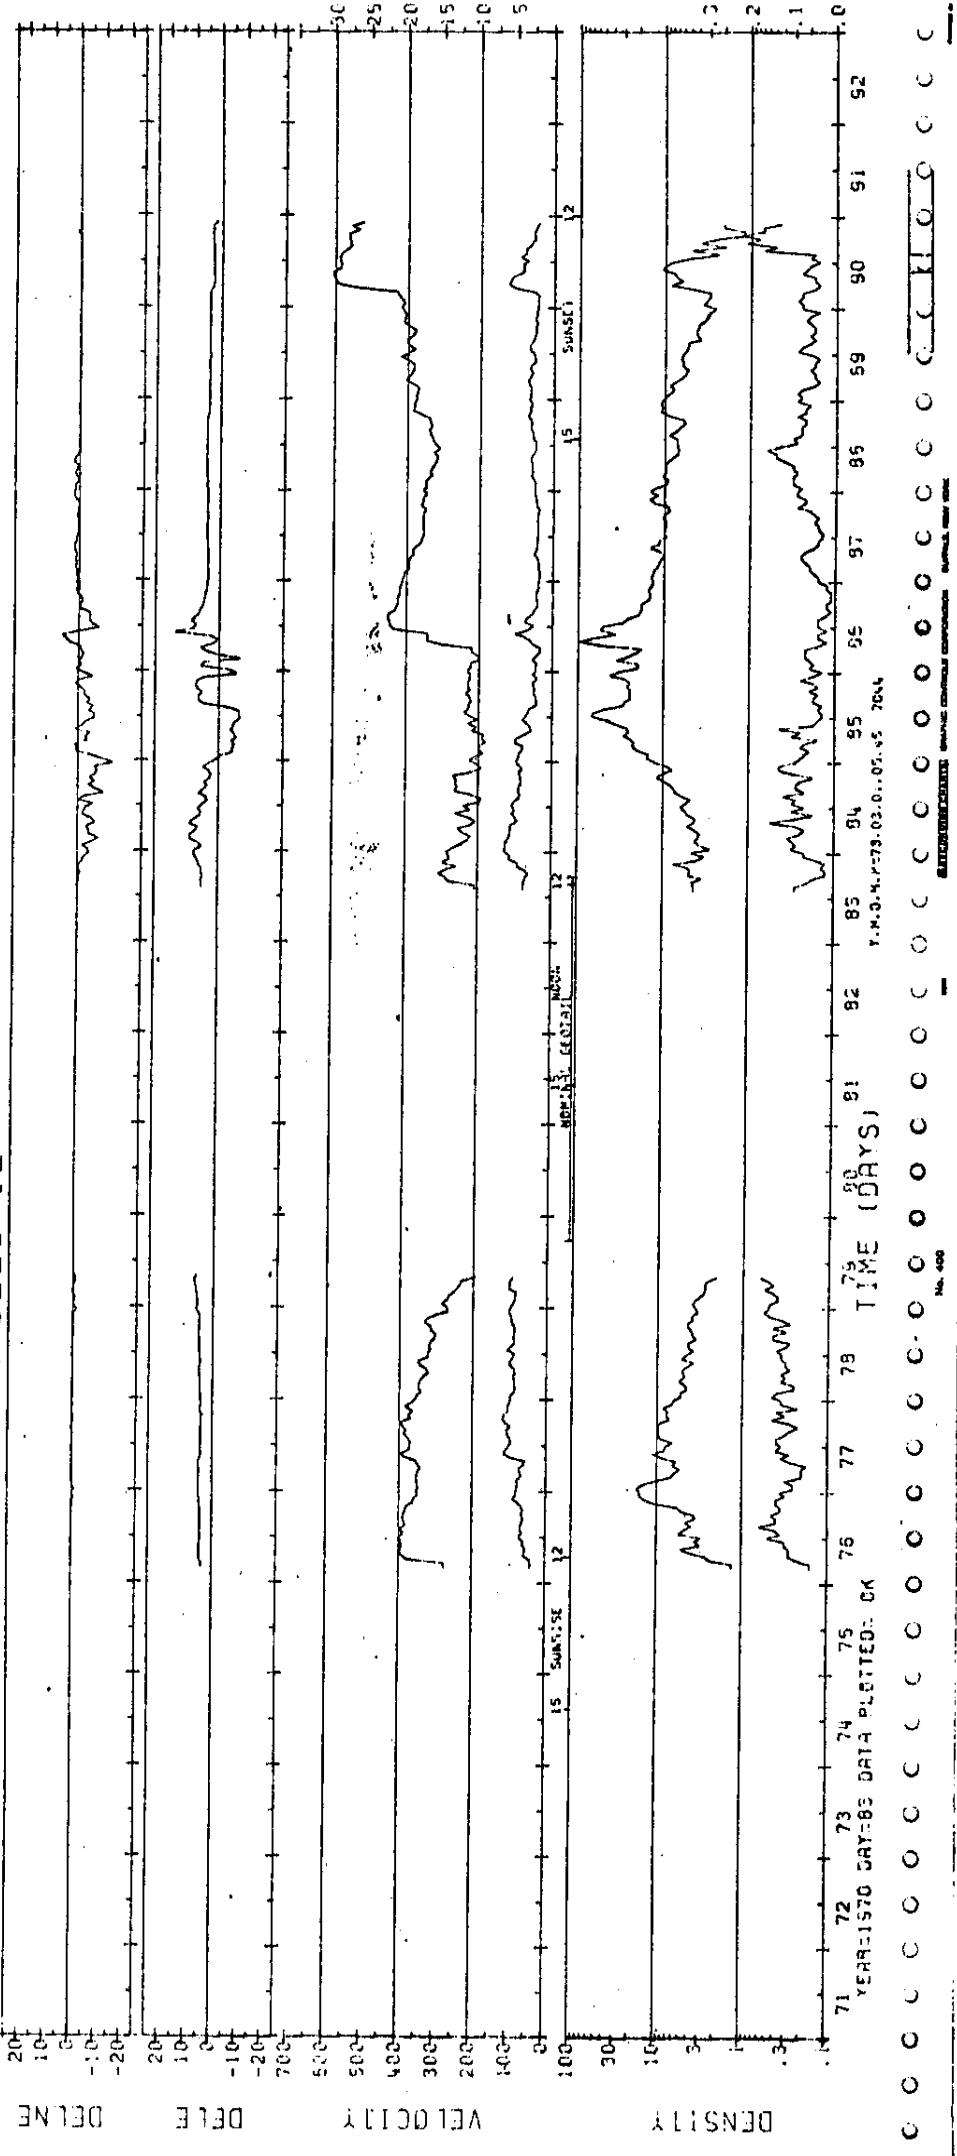

DAY 3) - / 3:1 TWO

Apples 12 - 05/17/14

```

- STEP 01 -      RETURN CODE = 0000          •18)
EXEC PGW=*.LINK.SYSLMOD,CCND=(4,L,T).REGION=70K
XXGC          DISK= 10. 27.DRUN= .56.TAPE= .00.CELL=
              STEP-TIME = .20 WINS=(CPII= .02.10=
              .00.OTHRE= .00.0230

```

1	1211212070202	202020201111	1111111120200	010207092020	010310201220	12202020202020	20202020202020
49	202021020220	202021020220	20202102020020	20202102020020	1211212070202	120301122020	2011220122020
97	-201220201220	-201220201220	-201220201220	-201220201220	-201220201220	-201220201220	-201220201220
145	121212070202	2020203011212	120303102020	2012201022020	2012201022020	2012201022020	2012201022020
163	121111020200	2020120201220	2020120201220	2020120201220	2020120201220	2020120201220	2020120201220
241	201220201220	202012020200	121203120112	070412021212	12111012020	2003120201220	2001120202001
289	121212070202	202003011212	120520020202	20122010220	20122010220	20122010220	20122010220
337	1211111012020	2011220201220	2011220201220	2011220201220	2011220201220	2011220201220	2011220201220
385	201220201220	202003011212	121203120112	070412021212	1211110702020	201220201220	201220201220
433	121212070202	202003011212	120505102020	20122010220	20122010220	20122010220	20122010220
481	1211110412020	200902201220	200902201220	200902201220	200902201220	200902201220	200902201220
529	121220201220	202012020200	121203120112	070412021212	12111052020	200520200220	201220201220
577	1211212070202	202003011212	120505102020	20122010220	20122010220	20122010220	20122010220
625	121111052020	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220
673	121220201220	202003011212	1207050102020	20122010220	20122010220	20122010220	20122010220
721	121212070202	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220
769	121111072020	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220
817	201220201220	200903011212	12121094072020	20122010220	20122010220	20122010220	20122010220
865	121212076202	202003011212	120412021212	070412021212	12111062020	2009200201220	201220201220
913	121111012020	200903011212	120412021212	070412021212	12111062020	2009200201220	201220201220
961	121212070202	2009020201220	121203102020	070412021212	12111062020	2009200201220	201220201220
1009	121212070202	202003011212	1211104032020	20122010220	20122010220	20122010220	20122010220
1057	122012070202	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220	2009020201220
1105	201220201220	200903011212	120412021212	070412021212	12111062020	2009200201220	201220201220
1153	121212070202	202003011212	011203102020	20122010220	20122010220	20122010220	20122010220
1201	121111072020	2009020201220	120412021212	070412021212	12111062020	2009200201220	201220201220
1249	261220201220	2009020201220	120412021212	070412021212	12111062020	2009200201220	201220201220

1	13(673	2012202C122C	202012202C2C20	121203122112	070412021212	121111072C2C	2001120201220	2001120200202	2002122002002
1	21(721	20010301202C	20010301202C	0505041202C	2012202012020	201220201220	2012202012020	121120212112	070412021212
1	129(769	12111012C2C	200320201220	200120201220	200120201220	121120212020	2010130712C7	0506211202	2012202012020
1	17(817	1212020122C	200210301220	12120201112	070412021212	121111012020	200220201220	2012202012020	2012202012020
1	145(865	121211072C2C	2001030121207	0506031220C	201220201220	201220201220	201220201220	121111012020	2012202012020
1	153(913	121110132C2C	200620201220	200120201220	200120201220	1212020120304	2011212070202	20103071207	050720052020
1	61(961	1212203122C	200610301220	12120312112	070412021212	121111072020	201220201220	2012202003	202012200407
1	69(1069	121212076202	2006103012207	05100211202C	2012202012202	201220201220	201220201220	121121020202	121121020202
1	77(1057	12021012C2C	20020120201220	201220201220	0201220201220	1212120201220	20103071207	0510105017202	2012202012020
1	110(1105	12122020122C	20020120201220	1212020120112	070412021212	121111012020	20120201220	20120201012	2020122012020
1	153(1153	12121207205	2006103012207	05110205202C	201220201220	201220201220	201220201220	121202012020	20120201012
1	201(1201	12111012C2C	200122020220	12120312112	070412021212	121111062020	20103071207	051105042020	2012202002020
1	209(1249	121220201220	2002012202020	121203122020	070412021212	121111062020	20103071207	051105042020	2012202002020
1	225(1297	12120201220	200103071210	1212020202C	201220201220	201220201220	201220201220	121120212112	070412021212
1	33(1345	1211101202C	200320201220	200120201220	200120201220	121120201220	20103071210	051020202020	2012202002020
1	33(1393	12022020122C	200620122020	12120312112	070412021212	121111072020	201220201220	2012202003	202012200103
1	24(1441	121212072020	200103071210	1201010202C	201220201220	201220201220	201220201220	121201120102	121212021212
1	249(1489	122012052C2C	200120201220	120120201220	200120201220	1212120201220	20103071210	120104062020	2012202012020
1	257(1537	12202020122C	200201202020	121202120112	070412021212	121111012020	200202201220	2012202012012	202012200104
1	265(1585	121212072020	200103071210	12010302020	02012202020	121220201220	201220201220	121203120112	070412021212
1	33(1633	12111107220	201220201220	201220201220	20012202020	121212072020	20103071210	12030112020	201220201220
1	87(1681	1202102122C	201220201220	12120201212	070412021212	121111012020	200320201220	2012202012012	202012200105
1	289	1729	121212072020	200103071210	12030310202C	201220201220	201220201220	201220201220	121203120112	070412021212
1	297(1777	12022020122C	200212020202	201220201220	201220201220	201220201220	201220201220	120406202020	2012202012020
1	301(1873	121212072020	200103071210	1212031042C	201220201220	201220201220	201220201220	121203120112	070412021212
1	313(1873	12111107220	200103071210	12010302020	02012202020	121220201220	201220201220	121203120112	070412021212
1	321(1921	12111107220	200201202020	12111107220	02012202020	121220201220	20103071210	120520022020	2012202012020
1	329(1969	201220201220	200201202020	12120201212	070412021212	121111012020	200220201220	2012202012020	2012202012020
1	345(2065	121212072020	200103071210	12050312202C	201220201220	201220201220	201220201220	121203120112	070412021212
1	353(2113	121212072020	200201202020	12120201212	070412021212	121111012020	200220201220	2012202012020	202012200204
1	61(2161	12122020122C	200201202020	12120201212	070412021212	121111012020	200220201220	2012202012020	202012200204
1	369(2209	12121101202C	200320201220	120103071210	200122020202	201220201220	202616062020	12122912020	070442021212
1	377(2257	12120202022C	200201202020	121203120112	070412021212	121111052020	200420201220	2012050202020	2020122002020

RECORD = 6235 OF FILE 1
LENGTH = 2304 BYTES

261 (1681)	201220201222C	2022C1122C020	121202120112	070412021212	1211110112C20	200320201220	201220201212	202012202002
289 (1729)	12121201202	02010301210	020402C1220	02012202C2C10	121212020102	201220201220	070412021212	070412021212
297 (1777)	121111052C20	2004202C1220	1212202C22C	20010201220	121111072020	200103071210	020501122020	2012201220200
305 (1825)	2012202C1220	20010301210	02050311C202C	121111012111	070412021202	20010201220	202012202004	202012202001
313 (1873)	121212070220	20010302C1220	02050202C1220	12122021220	201220201220	121202120112	070412021212	070412021212
321 (1921)	121111012C20	2002202C1220	121220202C12	2002012202002	12121207202	200103071210	02072002020	201220122020
329 (1969)	2012202C1220	2002012202002	1212202C1220	20012202C1220	12121207202	200103071210	02072002020	201220122020
337 (2067)	121212070220	200103071210	020703122C2C	20012202C1220	12121207202	200103071210	020705102020	201220122020
345 (2105)	121111062C20	20010202C1220	201220201220	121203120112	070412021202	200220120200	201220122005	2020122012005
353 (2113)	201220201220	200103071210	021212070220	12111103202	12111103202	200120212020	121203120112	070412021212
361 (2161)	121212070220	200103071210	021002062C	2012202C1220	12120202002	202012021200	021102020200	201220122002
369 (2209)	121111062C20	2003202C1220	201220202012	121203120112	070412021202	201103071210	041020052020	202220122002
377 (2257)	201220201220	2002012202002	121203120112	070412021212	121111072020	201103071210	0201220202002	202012202001
1 (49)	121212070202	2009103071210	021105122C020	2012202C200	20010201220	2012202C1220	200122020200	121203120112
9 (97)	121111072020	20120202C1220	20120201220	12120312C112	070412021212	121111032020	200022020120	031201102020
17 (145)	121212070202	20010302C1220	2012202C020	2012202C020	20010201220	201212070202	200103071210	03120104032020
33 (193)	121111072020	20012202C1220	20020122C020	12120212020	070412021212	121111012020	200220201220	031201202020
41 (241)	121220201220	20020130202	121210202	1212031030	070412021212	121111012020	200220201220	020212200103
49 (269)	121111072020	20020130202	121210202	1212031030	070412021220	121111012020	200212020120	070412021212
57 (337)	121111062C20	2002202C1220	2002012202002	12120202C021	070412021201	121212070202	200103071210	030320072020
65 (385)	2012202C1220	2002012202002	12120202C021	12120202C021	070412021212	121212070202	200012020120	0202012202001
73 (433)	121212070220	2000103071210	03030305202C	201220201220	070412021202	121212070220	2000120201220	0200120201220
81 (481)	121212070220	20012202C1220	200122020202	12120202020	070412021202	121212070220	200103071210	030420032020
89 (529)	201220201220	2000103071210	03040301202C	201203012020	070412021212	12120202020	200102012200	020122012200
97 (577)	121212070220	2000103071210	0302202C1220	200220202001	070412021220	121212070202	2000103071210	030502072020
105 (625)	121211103202C	2002202C1220	2002102202C1220	12120312020	070412021212	121212070202	200022020120	020122012200
113 (673)	201220201220	2002102202C1220	121212070220	12120312020	070412021212	121212070202	200022020120	0202012200101
121 (721)	121212070220	2000103071210	03050505202C	201220201220	070412021202	121212070202	200022020120	0202012200101
129 (769)	121212070220	2009103071210	03050505202C	201220201220	070412021202	121212070202	200022020120	0202012200101
137 (817)	201220201220	2009103071210	03050505202C	201220201220	070412021202	121212070202	200022020120	0202012200101
145 (865)	121212070202	200103071210	03060501202C	201220201220	070412021202	121212070202	200022020120	0202012200101
153 (913)	1212111072020	20012202C1220	200122020202	12120202020	070412021202	121212070202	200022020120	0202012200101
161 (961)	201220201220	2002013071210	03010301202C	201220201220	070412021202	121212070202	200022020120	0202012200101
169 (1009)	121212070202	2002013071210	03070410202C	201220201220	070412021202	121212070202	200022020120	0202012200101
177 (1057)	121211103202C	2002013071210	03070410202C	201220201220	070412021202	121212070202	200022020120	0202012200101
185 (1105)	201220201220	2002013071210	03070410202C	201220201220	070412021202	121212070202	200022020120	0202012200101
193 (1153)	121212070202	2002013071210	03070410202C	201220201220	070412021202	121212070202	200022020120	0202012200101
201 (1201)	201220201220	2002013071210	03070410202C	201220201220	070412021202	121212070202	200022020120	0202012200101
209 (1249)	121212070202	2002013071210	03070505202C	201220201220	070412021202	121212070202	200022020120	0202012200101
217 (1297)	121212070202	2002013071210	03070505202C	201220201220	070412021202	121212070202	200022020120	0202012200101
225 (1345)	1212111012C20	200203202C1220	201220202012	12120202020	070412021202	121212070202	200022020120	0202012200101
233 (1441)	121212070202	200203202C1220	201220202012	12120202020	070412021202	121212070202	200022020120	0202012200101
249 (1489)	121211105202C	200202202C1220	20020220202C	12120202020	070420202020	121212070202	200022020120	0202012200101
257 (1537)	201220201220	200202202C1220	12120202020	12120202020	070420202020	121212070202	200022020120	0202012200101
265 (1585)	121212070202	2002013071210	040205C622C	201220202020	070420202020	121212070202	200022020120	0202012200101
273 (1633)	121212070202	2002013071210	040205C622C	201220202020	070420202020	121212070202	200022020120	0202012200101
281 (1681)	201220201220	2002013071210	040205C622C	201220202020	070420202020	121212070202	200022020120	0202012200101
337 (1729)	121212070202	2002013071210	040205C622C	201220202020	070420202020	121212070202	200022020120	0202012200101
297 (1777)	1212111012C20	200203202C1220	201220202020	12120202020	070420202020	121212070202	200022020120	0202012200101
305 (1825)	201220201220	200203202C1220	201220202020	12120202020	070420202020	121212070202	200022020120	0202012200101
313 (1873)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
321 (1921)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
329 (1969)	201220201220	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
345 (2065)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
353 (2113)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
361 (2161)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
369 (2209)	121212070202	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101
377 (2257)	201220201220	2002013071210	04025010702C	201220202020	070420202020	121212070202	200022020120	0202012200101

APOLLO 12 LM/ALSEP

HR AVG PLASMA PARAM ON MAG TAPE

69-099C-02B

This data set has been restored. There were originally 7 7-track, 800 BPI tapes written in Binary. There is one restored tape. The DR tape is a 3480 cartridge and the DS tape is 9-track, 6250 BPI. The original tapes were created on a 1108 computer and the restored tapes were created on an IBM 9021 computer. The DR and DS numbers along with the corresponding D numbers are as follows:

DR#	DS#	D#	FILES	TIME SPAN
DR004969	DS004969	D016704	1	11/19/69 - 01/29/73
		D023611	2	02/10/73 - 12/31/73
		D041552	3	09/24/74 - 01/07/75
		D041553	4	01/20/75 - 05/06/75 (a)
		D041554	5	05/19/75 - 09/01/75
		D041555	6	09/13/75 - 12/28/75
		D041556	7	01/10/76 - 03/26/76

(a) D041553: Read error occurred in record 1435 of file 1.

See 69-099C-02A

```

        SYS2.CUMMY
        VOL SER NOS= K3SY2.
        SYS2.CUMMY
        VOL SER NOS= K3SY2.
        SYS1.FORT18
        VOL SER NOS= K3SY6.
        SYS2.FORT18
        VOL SER NOS= K3SY2.
        SYS1.SPLLIB
        VOL SER NOS= K3SY6.
        SYS1.ALGLIB
        VOL SER NOS= K3SY6.
        SYS1.FORSSP
        VOL SER NOS= K3SY2.
        SYSZ.ACBLIB
        VOL SER NOS= K3SY6.
        SYS1.
        VOL SER NOS= K3SY6.
        SYS1.FORSSP
        VOL SER NOS= K3SY2.
        SYS7612.T174759.RV000.YZJRJWA3.LODMCO
        VOL SER NOS= K3SCR2.
        SYS7612.T174759.SY000.YZJRJWA3.R0001130
        VOL SER NOS= K3SCR2.
        SYS7612.T174759.SY000.YZJRJWA3.R0001131
        VOL SER NOS= K3SCR2.
        SYS7612.T174759.RV000.YZJRJWA3.R0001132
        VOL SER NOS= K3SCR2.
        SYS7612.T174759.RV000.YZJRJWA3.S0001133
        VOL SER NOS= K3SCR2.
        SYS7612.T174759.RV000.YZJRJWA3.S0001133
        VOL SER NOS= K3SCR2.
        IEF3731 STEP /LINK / START 76113.C430
        IEF3741 STEP /LINK / STOP 76113.C431 CPU 0MIN 01.30SEC MAIN 130K LCS OK
        - STEP 01 - RETURN CODE = 0000
        IO IN SEC. DISK= 10.17.DRM= .56.TAPE= .02.IOS= (CPU=
        .00.CELL= .00,OTHRE= .16
        XXGC EXEC PGM=* LINK SYSLIN,COND=(4,LT),REGION=70K
        XXFT05F001 CD QNAME=DATAS
        XXFT06F001 DD SYSOUT=OUT,DCB=(RECFM=VBA,LRECL=137,BLKSIZE=640)
        XXFT06F001 DD SYSOUT=SOUT,DCB=(RECFM=VBA,LRECL=137,BLKSIZE=7265)
        IEF6531 SUBSTITUTEC JCL-
        XXFT07F001 DD SYSOUT=T,DCB=(RECFM=FB,BLKSIZ=7260,LRECL=80)
        XXSYSPRINT DD SYSOUT=EQUT,DCB=(RECFM=VBA,LRECL=37,BLKSIZE=640)
        IEF6531 SUBSTACN JCL-
        XX SPACE=(CYL,(0,1)) UNIT=(DISK,3)
        //GCC.FTC8F001 DD UNIT=7TRACK,DISP=(OLD,NEFP),LABEL='01.BLP..IN'.
        // DCB=(BLKSIZE=32000,RECFM=U,DEN=2,TRTCH=E,
        // VOL=SER=JJ0029
        //GC.DATAS DD *
        // IEF2361 ALLOC. FOR YZJRJWA3 GO
        IEF2371 231 ALLOCATED TO FT05F001
        IEF2371 232 ALLOCATED TO FT06F001
        IEF2371 231 ALLOCATED TO FT07F001
        IEF2371 232 ALLOCATED TO SYSPRINT
        IEF2371 231 ALLOCATED TO SYSPRINT
        IEF2371 231 ALLOCATED TO FT08F001
        IEF2371 0C0 ALLOCATED TO FT08F001

```

APRIL 12 69~ 0994 ~ 02B

D-23611

02/10/73 ~ 02/31/73

DAY - 41 - 365

	RECORD LENGTH = 1 OF FILE 1	RECORD LENGTH = 1 OF FILE 1
1(1)	121201121002 4 1/4/30 b	20010207C320 4 1/4/30 b
9(49)	202020122002 202020122002	040101040312 202020122002
17(97)	122202012202 202020122002	202020122002 202020122002
25(145)	202220202012 202020202002	12120202012 202020202002
33(193)	202012202020 202012202002	202012202012 202020202002

RECORD LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040101050312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040101050312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040101050312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040101050312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040101050312 202012202020 122012202020 202020122020

RECORD = 3 OF FILE 1
LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040101060312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040101060312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040101060312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040101060312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040101060312 202012202020 122012202020 202020122020

RECORD = 4 OF FILE 1
LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040101070312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040101070312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040101070312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040101070312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040101070312 202012202020 122012202020 202020122020

RECORD = 5 OF FILE 1
LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040101100312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040101100312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040101100312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040101100312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040101100312 202012202020 122012202020 202020122020

RECORD = 6 OF FILE 1
LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040101110312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040101110312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040101110312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040101110312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040101110312 202012202020 122012202020 202020122020

RECORD = 7 OF FILE 1
LENGTH = 216 BYTES

1(1) 121201121002 200102070320 040102120312 202012202020 122012202020 202020122012
9(49) 202020122020 122020201220 040102120312 202012202020 122012202020 202020122020
17(97) 122020122020 201220201220 040102120312 202012202020 122012202020 202020122020
25(145) 201220201220 202020122012 040102120312 202012202020 122012202020 202020122020
33(193) 202012202020 122012202020 040102120312 202012202020 122012202020 202020122020

9(49)	202004032CCCC	03202004072C	200604010C2C7	200202032004	200403050112	032040030720	200204202004	042004202004
7(97)	12200402200201	040620040604	120200412002	200202020020	200502200200	062004200403	12011202202040	0320401000200
5(145)	0412202020211	202004060004	202004032002	1220040041020	200711200110	200311110101		
3(163)	4001042020205	102006202C03	11200301202C	050220201010				

RECORD 9686 OF FILE 1
LENGTH = 216 BYTES

1(1)	121201121C02	200102070604	111112121212	202020202020	202020202020
9(49)	202020202C2C	2020202C20	202020202020	202020202020	202020202020
17(97)	2020202C2C	2020202C20	202020202020	202020202020	202020202020
25(145)	202020202C2C	2020202C20	202020202020	202020202020	202020202020
33(193)	202020202C	2020202020	202020202020	202020202020	202020202020

RECORD 9687 OF FILE 1

```

IEF1421 - STEP WAS EXECUTED - COND CODE OCCURRED
          SYS76112.T174759.RV000.YZJRJWA3.L0DMD  PASSED
          VOL SER NO$= K3SCR2.
          SYS76112.T174759.RV000.YZJRJWA3.S0001138  SYS IN
          VOL SER NO$= K3SCR3.
          SYS76112.T174759.RV000.YZJRJWA3.S0001138  DELETED
          VOL SER NC$= K3SCR3.
          SYS76112.T174759.SV000.YZJRJWA3.R0001134  SYS OUT
          VOL SER NO$= K3SCR2.
          SYS76112.T174759.SV000.YZJRJWA3.R0001135  DELETED
          VOL SER NO$= K3SCR3.
          SYS76112.T174759.SV000.YZJRJWA3.R0001136  DELETED
          VOL SER NO$= K3SCR2.
          SYS76112.T174759.RV000.YZJRJWA3.R0001137  KEPT
          VOL SER NO$= JJC029.
          K0C0.C,JJC029.YZJRJWA3.G0
          / START 76113.0431
          / STOP 76113.0439 CPU 0MIN 26.94SEC MAIN 156K LCS OK
          / RETURN CCDE = 0000 3.70 MINS=(CPU= *44,IO=
IEF2851 STEP /GC IEF3741 STEP /GC
IEF2851 STEP /GO IEF3741 STEP /GO
IEF2851 - STEP 02 - RETURN CCDE = 0000 3.70 MINS=(CPU= *44,IO= 3.26)

```

APOLLO 15 LM/ALSEP

PLASMA PARAM FINE RESOL ON MAG TAPE

71-063C-04A

This data set has been restored. There were originally 3 7-track, 800 BPI tapes written in BCD. There is one restored tape written in ASCII. The DR tape is a 3480 cartridge and the DS tape is 9-track, 6250 BPI. The original tapes were created on a 360 computer and the restored tapes were created on an IBM 9021 computer. The DR and DS numbers along with the corresponding D numbers are as follows:

DR#	DS#	D#	FILES	TIME SPAN
-----	-----	-----	-----	-----
DR004974	DS004974	D013774	1	07/31/71 - 12/08/71
		D016706	2	12/25/71 - 05/02/72
		D016705	3	05/18/72 - 06/30/72

See 69-099C-02A

May 18 - June 30, 1972

APOLLO 15 LM/ALSEP

1 HR. AVG. PLASMA PARAM ON MAG TAPE

71-063C-04B

This data set has been restored. There were originally 2 7-track, 800 BPI tapes written in BCD. There is one restored tape written in ASCII. The DR tape is a 3480 cartridge and the DS tape is 9-track, 6250 BPI. The original tapes were created on a 360 computer and the restored tapes were created on an IBM 9021 computer. The DR and DS numbers along with the corresponding D numbers are as follows:

DR#	DS#	D#	FILES	TIME SPAN
DR004975	DS004975	D013775 D016707	1 2	07/31/71 - 12/08/71 07/31/71 - 06/30/72 (a)

(a) D016707: Read errors occurred in records 229, 393, 907 of file 1.

See 69-099C-02A

FEATLAB DETAIL REPORT

1...5...10...15...20...25...30...35...40...45...50...55...60...65...70...75...80
 (COLUMN GRID IS VALID ONLY FOR CHARACTER FORMATTED DATA)

EATAP DETAIL REPORT

BLOCK NUMBER LENGTH/ DISPLAY MESSAGE/BLOCK TYPE

11.1.5...10.1.15...20.25...30.35...40.45...50.55...60.65...70...75...80
(COLUMN GRID IS VALID ONLY FOR CHARACTER FORMATTED DATA)